Declaration of conformity
Products with a CE symbol fulfill the RoHS directive (2011/65/EU+2015/863+ 2017/2102), which were released by the EU-Commission.

The declaration of conformity can be downloaded under documents:
https://www.delock.de/produkte/G_62063/merkmale.html


WEEE-notice
The WEEE (Waste Electrical and Electronic Equipment)-directive, which became effective as European law on February 13th 2003, resulted in an all out change in the disposal of disused electro devices. The primarily purpose of this directive is the avoidance of electrical waste (WEEE) and at the same time the support of recycling and other forms of recycling in order to reduce waste. The WEEE-logo on the device and the package indicates that the device should not be disposed in the normal household garbage. You are responsible for taking the disused electrical and electronical devices to a respective collecting point. A separated collection and reasonable recycling of your electrical waste helps handling the natural resources more economical. Furthermore recycling of electrical waste is a contribution to keep the environment and thus also the health of men. Further information about disposal of electrical and electronical waste, recycling and the collection points are available in local organizations, waste management enterprises, in specialized trade and the producer of the device.



EU Import: Tragant Handels- und Beteiligungs GmbH
Beeskowdamm 13/15, 14167 Berlin, Germany

User manual
Bedienungsanleitung

Network Surge Protector RJ45 Outdoor Enclosure

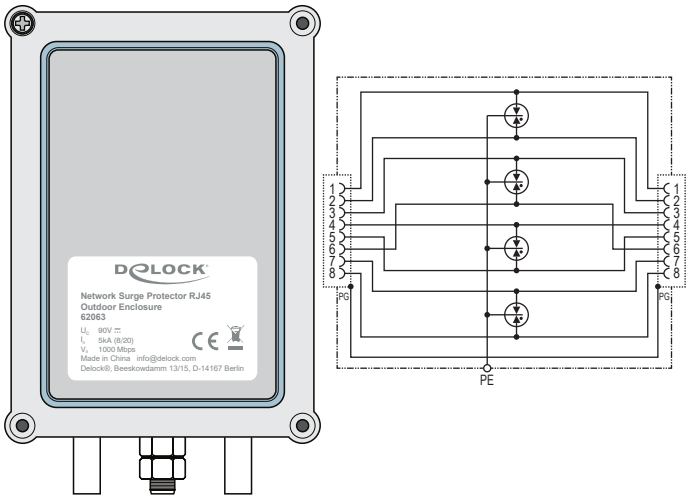

Product-No: 62063
User manual no: 62063-a
www.delock.com

Technische Daten

Ableiterklasse		Typ 2, LPZ 0_B-2 oder höher
Nennspannung	U_N	48V-
DC Überschlagspannung (bei 100V/s)	$U_{DC\ spark}$	90V-
Max. Impulsüberschlagspannung (bei 1kV/µs)	$U_{max.\ spark}$	700V
Nennableitstoßstrom (8/20µs)	I_N	2,5kA
Gesamt Nennableitstoßstrom (8/20µs)	I_{total}	5kA
Schutzpegel	U_p	≤ 600V
Max. Isolationswiderstand (bei 50V)	R	1G Ohm
Max. Kapazität (bei 1MHz)	C	1,0 pF
Datentransferrate	V_s	1000Mbps
Betriebstemperaturbereich		-35 °C ~ +65°C
Relative Luftfeuchtigkeit		≤ 95% (25°C)
Anschlüsse		RJ45 geschirmt (Eingang / Ausgang)
Schutzart		IP 65
Erdung über		Schraubterminal
Montage		Metallclips oder Schrauben
Gehäusematerial		Thermoplastik
Teststandards		IEC 61643-21; EN 61643-21

Technical data

SPD class		Type 2, LPZ 0_B-2 or higher
Nominal voltage	U_N	48V-
DC spark-over voltage (at 100V/s)	$U_{DC\ spark}$	90V-
Max. impulse spark-over voltage (at 1kV/µs)	$U_{max.\ spark}$	700V
Nominal discharge current (8/20µs)	I_N	2.5kA
Total nominal discharge current (8/20µs)	I_{total}	5kA
Voltage protection level	U_p	≤ 600V
Max. insulation resistance (at 50V)	R	1G ohm
Max. capacitance (at 1MHz)	C	1.0 pF
Max. data transmission rates	V_s	1000Mbps
Operating temperature range		-35 °C ~ +65°C
Relative humidity		≤ 95% (25°C)
Connection		RJ45 shield (input / output)
Waterproof rating		IP 65
Earthing via		Screw terminal
Mounting on		Metal clip or screws
Enclosure material		Thermoplastic
Test standards		IEC 61643-21; EN 61643-21

English

Description
The product is for installation at LZP 0_B-2 and higher interface or directly installed near the equipment; the RJ45 surge protect the network connection of a device against overvoltage. The compact device supports Ethernet with 10 / 100 / 1000 Mbps.

Main character
- For protecting computer data transmission system, network system and others
- Good discharge capacity, low voltage protection level
- Quick response, high transmission speed, low signal attenuation
- Suitable for sheltered outdoor application
- RJ45 connection, easy for installation

Application
The product is applied in offices and industrial Ethernet systems like Gigabit Ethernet, ATM,FDDI or ISDN.
VoIP or PoE systems can be protected.(e.g. switch, router, hub, modem and so on), Industrial Ethernet.


Safety instructions
- The device must be installed by electrically skilled person, conforming to national standards and safety regulations.
- It is recommended that installation should be done under power off condition.

Installation
1. This product is connected in series to the protected device.
2. The OUT terminal should be connected to the protected devices.
3. SPD's earthing terminal must be connected to nearby earthing BusBar or the metal earthing enclosure of the protected device.
4. After above, you should ensure the circuit is functioning.

Regularly inspect the operating status, especially after lightning.
Once the communication is off, electrician should check/replace the SPD.

Note: Input cable and output cable must be laid out separately, otherwise it can cause interference!

Installation diagram

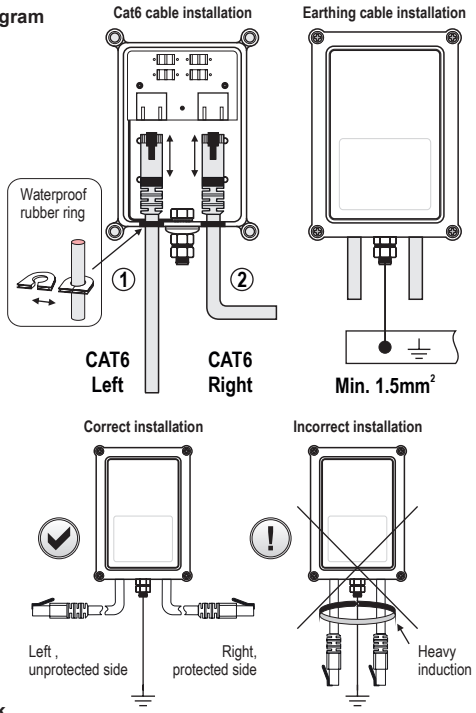

Support Delock
If you have further questions, please contact our customer support support@delock.de
You can find current product information on our homepage: www.delock.com

Final clause
Information and data contained in this manual are subject to change without notice in advance. Errors and misprints excepted.

Copyright
No part of this user's manual may be reproduced, or transmitted for any purpose, regardless in which way or by which means, electronically or mechanically, without explicit written approval of Delock.
Edition: 05/2026

Deutsch

Beschreibung
Das Produkt ist für die Installation am Übergang LPZ 0_B-2 und höher oder direkt in der Nähe des Gerätes vorgesehen. Gemäß IEC Norm für Cat. 6 oder Class E integrierte Verkabelungssysteme und Industrie Ethernet 10M, 100M, 1GBit Überspannungsschutz.

Eigenschaften
- Zum Schutz von Computerdatenübertragungssystemen, Netzwerksystemen und anderen
- Schnelle Reaktion, hohe Übertragungsgeschwindigkeit, geringe Signaldämpfung
- Geeignet für den geschützten Außenbereich
- RJ45-Anschluss, einfache Installation

Anwendung
Das Produkt kann in Büros und industriellen Ethernet-Systemen wie Gigabit Ethernet, ATM, FDDI oder ISDN eingesetzt werden.
VoIP- oder PoE-Systeme können geschützt werden. (z. B. Switch, Router, HUB, Modem usw.), industrielles Ethernet.


Sicherheitshinweise
- Das Gerät muss von einer elektrotechnisch unterwiesenen Person gemäß den nationalen Normen und Sicherheitsvorschriften installiert werden.
- Es wird empfohlen, die Installation bei ausgeschaltetem Gerät durchzuführen.

Installation
1. Dieses Produkt wird in Reihe mit dem zu schützenden Gerät geschaltet.
2. Der OUT-Anschluss muss mit den zu schützenden Geräten verbunden werden.
3. Der Erdungsanschluss des Produkts muss mit einer nahe gelegenen Erdungsschiene oder dem metallischen Erdungsgehäuse des zu schützenden Geräts verbunden werden.
4. Anschließend sollten Sie sicherstellen, dass der Stromkreis funktioniert.

Überprüfen Sie regelmäßig den Betriebszustand, insbesondere nach einem Blitzschlag.
Sobald die Kommunikation unterbrochen ist, sollte ein Elektriker das Produkt überprüfen/austauschen.

Hinweis: Eingangs- und Ausgangskabel müssen getrennt verlegt werden, da es sonst zu Störungen kommen kann.

Installationsdiagramm

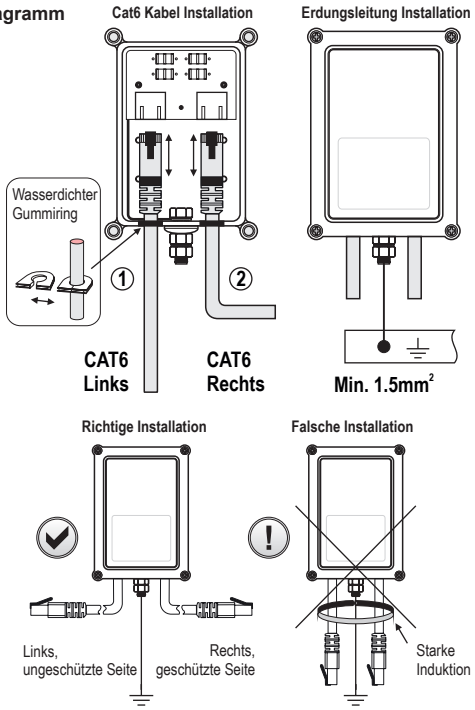

Support Delock
Bei weitergehenden Supportanfragen wenden Sie sich bitte an support@delock.de
Aktuelle Produktinformationen finden Sie auf unserer Homepage: www.delock.de

Schlussbestimmung
Die in diesem Handbuch enthaltenen Angaben und Daten können ohne vorherige Ankündigung geändert werden. Irrtümer und Druckfehler vorbehalten.

Copyright
Ohne ausdrückliche schriftliche Erlaubnis von Delock darf kein Teil dieser Bedienungsanleitung für irgendwelche Zwecke vervielfältigt oder übertragen werden, unabhängig davon, auf welche Art und Weise oder mit welchen Mitteln, elektronisch oder mechanisch, dies geschieht.
Stand: 05/2026