APC Easy 3S Unterbrechungsfreie Stromversorgung (USV) Doppelwandler (Online) 15 kVA 15000 W

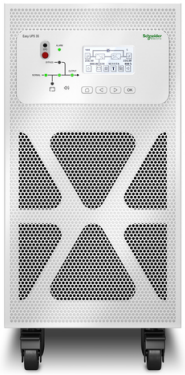

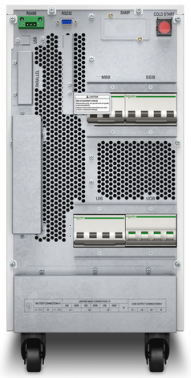

Marke : APC

Artikel-Code: E3SUPS15KH

Produktname : Easy 3S

Easy UPS 3S, 15 kVA, 400 V, 50/60 Hz, 530x250x700 mm
APC Easy 3S. USV-Topologie: Doppelwandler (Online), Ausgangskapazität: 15 kVA, Ausgangsleistung: 15000 W. Formfaktor: Tower, Produktfarbe: Weiß, Internationale Schutzart (IP-Code): IP20. Zertifizierung: CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE. Breite: 250 mm, Tiefe: 700 mm, Höhe: 530 mm. Verpackungsbreite: 400 mm, Verpackungstiefe: 857 mm, Verpackungshöhe: 772 mm

Merkmale	
USV-Topologie *	Doppelwandler (Online)
Ausgangskapazität *	15 kVA
Ausgangsleistung *	15000 W
Wellenform *	Reiner Sinus
Eingangs-Betriebsspannung (min) *	304 V
Eingangs-Betriebsspannung (max) *	477 V
Eingangsfrequenz *	45/65 Hz
Ausgangs-Betriebsspannung (min)	380 V
Ausgangs-Betriebsspannung (max)	415 V
Output Frequenz	50/60 Hz
Stromstärke (maximal)	28 A
Anzahl der Eingangs-Phasen	3
Anzahl der Ausgangs-Phasen	3
Eingangs-Leistungsfaktor	0,99
Crest-Faktor	3:1
Überlastbarkeit (10 Minuten)	125%
Überlastbarkeit (1 Minute)	150%
Ausgangsspannung Gesamtverzerrungsfaktor THD	3%
Eingangsstrom Gesamtverzerrungsfaktor THD	3%
Geräuschpegel	60 dB
Energieschutzeigenschaften	Überlastung

Anschlüsse und Schnittstellen	
SmartSlot	✔
SmartConnect-Anschluss	✘

Design	
Internationale Schutzart (IP-Code)	IP20

Betriebsbedingungen	
Betriebstemperatur	0 - 40 °C
Temperaturbereich bei Lagerung	-15 - 40 °C
Relative Luftfeuchtigkeit in Betrieb	0 - 95%
Luftfeuchtigkeit bei Lagerung	0 - 95%
Höhe bei Betrieb	0 - 984,3 m
Höhe bei Lagerung	0 - 14763,6 m

Zertifikate	
Zertifizierung	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE

Lieferumfang	
Management-Karte enthalten	✘
Schnellinstallationsanleitung	✔

Gewicht und Abmessungen	
Breite	250 mm
Tiefe	700 mm
Höhe	530 mm
Gewicht	36 kg

Verpackungsdaten	
Verpackungsbreite	400 mm
Verpackungstiefe	857 mm
Verpackungshöhe	772 mm
Paketgewicht	50 kg

Design	
Formfaktor *	Tower
Produktfarbe *	Weiß

Logistikdaten	
Warentarifnummer (HS)	85078000

Sonstige Funktionen	
Ausgangsspannung	400 V



0731304339335



731304339335

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.

Publication date: 21-NOV-2026. Prints or copies of Information are only valid on the printed Publication date